


DUPLEX SVPA

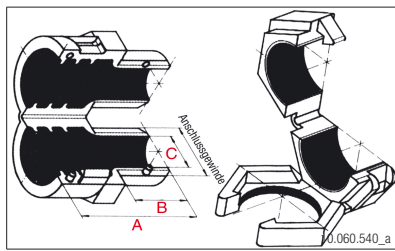

MAT	PA 6.6
TEMP	-40°C – +120°C
	IP 43

Schlauchverschraubung DUPLEX SVPA

Zweiteilig, inklusive teilbarer Mutter. Problemlose Nachinstallation.

Raccord de gaine DUPLEX SVPA

En deux parties avec contre-écrou. Adapté pour montage ultérieur.

Cable fitting DUPLEX SVPA

In two pieces, also the locknut. Secured against unforeseen opening. Suitable for later installation.

	NORM NW/DN	A mm	B mm	C mm				Plica-Nr.	E-Nr.	VE
Metrisch						Metrique		Metric		
M16	10	-	-	-	19			80.3011.416		1
M20	14	-	-	-	27			80.3011.420		1
M25	20	-	-	-	30			80.3011.425		1
M32	23	-	-	-	36			80.3011.432		1
M40	37	-	-	-	46			80.3011.440		1
M50	45	-	-	-	55			80.3011.450		1
PG						PG		PG		
PG9	10	27	12	9	19			80.3011.009	126 698 001	1
PG13.5	14	34	17	13	24			80.3011.013	126 698 003	1
PG21	20	34	17	20	32			80.3011.021	126 698 005	1
PG29	23	42	21	31	41			80.3011.029	126 698 006	1
	37	50	22	31	50			80.3011.030	126 698 007	1