


Kabelschutz
Isolierschlauch

Protection de cable
Gaines isolantes

Cable protection
Isolation conduit

PLICA PVC FLEX

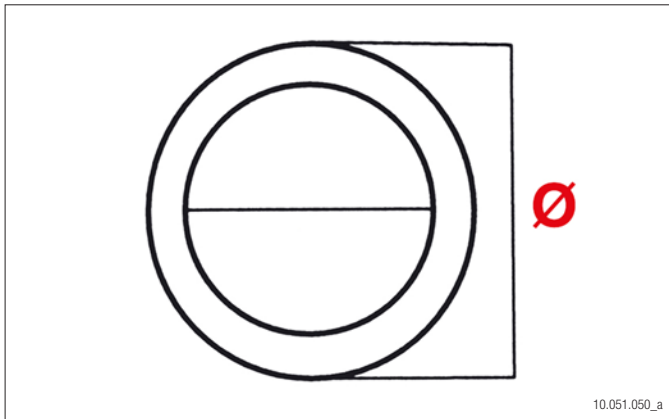


10.051.050_a




10.051.050_b


MAT PVC

TEMP -30°C bis +105°C
-30°C à +105°C
-30°C to +105°C

 Flammbeständigkeit nach UL 224
Résistance à la flamme après UL 224
Flame resistance after UL 224

 Zerreißfestigkeit ≥10.4
Résistance au déchirement ≥10.4
Tensile strength ≥10.4

 Ausdehnung ≥100%
Expansion ≥100%
Expansion ≥100%

 Spannungswert 600 V
Valeur de tension 600 V
Voltage value 600 V



REACH

RoHS

Isolierschlauch PLICA PVC FLEX

























Der Isolierschlauch überzeugt mit ausgezeichneter Flexibilität, mechanischer und dielektrischer Fähigkeit und ist flammbeständig. Er dient dem Schutz von Drähten oder Kabeln für elektrische Geräte, Transformatoren, Elektromotoren, Beleuchtungsanlagen, elektrische Komponenten und Kabelbäumen.

Gaine isolante PLICA PVC FLEX

Avec l'excellente flexibilité, la capacité mécanique et diélectrique, la performance de résistance à la flamme, la tuyauterie de PVC, est employé couramment dans la protection d'isolation extérieure des fils sortant de appareils électriques, transformateurs, moteurs électriques ou équipements d'éclairage, et composants, harnais de fils etc.

Isolation tube PLICA PVC

With the excellent flexibility, mechanical and dielectric capability, flame resistance performance, PVC tubing, is widely used in outside insulation protection of outgoing wires of electrical appliances, transformers, electrical motors or lighting equipment, and electronic components, wire harness and etc.












































| NORM |  |  | Plica-Nr. | E-Nr. | VE |
|-------|---|---|-------------|-------------|----|
| 1 mm | 1 mm |  | 80.1371.101 | 125 550 921 | 50 |
| 2 mm | 2 mm |  | 80.1371.102 | 125 551 421 | 25 |
| 3 mm | 3 mm |  | 80.1371.103 | 125 551 621 | 25 |
| 4 mm | 4 mm |  | 80.1371.104 | 125 551 821 | 25 |
| 5 mm | 5 mm |  | 80.1371.105 | 125 552 021 | 25 |
| 6 mm | 6 mm |  | 80.1371.106 | 125 552 221 | 25 |
| 7 mm | 7 mm |  | 80.1371.107 | 125 552 421 | 25 |
| 8 mm | 8 mm |  | 80.1371.108 | 125 552 621 | 25 |
| 9 mm | 9 mm |  | 80.1371.109 | 125 552 821 | 25 |
| 10 mm | 10 mm |  | 80.1371.110 | 125 553 021 | 25 |
| 12 mm | 12 mm |  | 80.1371.112 | 125 553 421 | 25 |
| 14 mm | 14 mm |  | 80.1371.114 | 125 553 721 | 25 |
| 15 mm | 15 mm |  | 80.1371.115 | 125 553 821 | 25 |
| 16 mm | 16 mm |  | 80.1371.116 | 125 553 921 | 25 |
| 18 mm | 18 mm |  | 80.1371.118 | 125 554 121 | 25 |
| 20 mm | 20 mm |  | 80.1371.120 | 125 554 321 | 25 |
| 25 mm | 25 mm |  | 80.1371.125 | 125 554 821 | 25 |
| 30 mm | 30 mm |  | 80.1371.130 | 125 555 321 | 25 |
| 35 mm | 35 mm |  | 80.1371.135 | 125 555 621 | 25 |
| 1 mm | 1 mm |  | 80.1371.201 | 125 550 920 | 50 |
| 2 mm | 2 mm |  | 80.1371.202 | 125 551 420 | 25 |
| 3 mm | 3 mm |  | 80.1371.203 | 125 551 620 | 25 |

Technische Änderungen vorbehalten – Sous réserve de changements techniques – Technical alterations reserved

Kabelschutz Isolierschlauch

Protection de cable Gaines isolantes

Cable protection Isolation conduit






















































| NORM |  |  | Plica-Nr. | E-Nr. | VE |
|-------|---|---|-------------|-------------|----|
| 4 mm | 4 mm |  | 80.1371.204 | 125 551 820 | 25 |
| 5 mm | 5 mm |  | 80.1371.205 | 125 552 020 | 25 |
| 6 mm | 6 mm |  | 80.1371.206 | 125 552 220 | 25 |
| 7 mm | 7 mm |  | 80.1371.207 | 125 552 420 | 25 |
| 8 mm | 8 mm |  | 80.1371.208 | 125 552 620 | 25 |
| 9 mm | 9 mm |  | 80.1371.209 | 125 552 820 | 25 |
| 10 mm | 10 mm |  | 80.1371.210 | 125 553 020 | 25 |
| 12 mm | 12 mm |  | 80.1371.212 | 125 553 420 | 25 |
| 14 mm | 14 mm |  | 80.1371.214 | 125 553 720 | 25 |
| 15 mm | 15 mm |  | 80.1371.215 | 125 553 820 | 25 |
| 16 mm | 16 mm |  | 80.1371.216 | 125 553 920 | 25 |
| 18 mm | 18 mm |  | 80.1371.218 | 125 554 120 | 25 |
| 20 mm | 20 mm |  | 80.1371.220 | 125 554 320 | 25 |
| 25 mm | 25 mm |  | 80.1371.225 | 125 554 820 | 25 |
| 30 mm | 30 mm |  | 80.1371.230 | 125 555 320 | 25 |
| 35 mm | 35 mm |  | 80.1371.235 | 125 555 620 | 25 |
| 1 mm | 1 mm |  | 80.1371.301 | 125 550 929 | 50 |
| 2 mm | 2 mm |  | 80.1371.302 | 125 551 429 | 25 |
| 3 mm | 3 mm |  | 80.1371.303 | 125 551 629 | 25 |
| 4 mm | 4 mm |  | 80.1371.304 | 125 551 829 | 25 |
| 5 mm | 5 mm |  | 80.1371.305 | 125 552 029 | 25 |
| 6 mm | 6 mm |  | 80.1371.306 | 125 552 229 | 25 |
| 7 mm | 7 mm |  | 80.1371.307 | 125 552 429 | 25 |
| 8 mm | 8 mm |  | 80.1371.308 | 125 552 629 | 25 |
| 9 mm | 9 mm |  | 80.1371.309 | 125 552 829 | 25 |
| 10 mm | 10 mm |  | 80.1371.310 | 125 553 029 | 25 |
| 12 mm | 12 mm |  | 80.1371.312 | 125 553 429 | 25 |
| 14 mm | 14 mm |  | 80.1371.314 | 125 553 729 | 25 |
| 15 mm | 15 mm |  | 80.1371.315 | 125 553 829 | 25 |
| 16 mm | 16 mm |  | 80.1371.316 | 125 553 929 | 25 |
| 18 mm | 18 mm |  | 80.1371.318 | 125 554 129 | 25 |
| 20 mm | 20 mm |  | 80.1371.320 | 125 554 329 | 25 |
| 25 mm | 25 mm |  | 80.1371.325 | 125 554 829 | 25 |
| 30 mm | 30 mm |  | 80.1371.330 | 125 555 329 | 25 |
| 35 mm | 35 mm |  | 80.1371.335 | 125 555 629 | 25 |
| 1 mm | 1 mm | transp. | 80.1371.401 | 125 550 934 | 50 |
| 2 mm | 2 mm | transp. | 80.1371.402 | 125 551 434 | 25 |
| 3 mm | 3 mm | transp. | 80.1371.403 | 125 551 634 | 25 |
| 4 mm | 4 mm | transp. | 80.1371.404 | 125 551 834 | 25 |
| 5 mm | 5 mm | transp. | 80.1371.405 | 125 552 034 | 25 |
| 6 mm | 6 mm | transp. | 80.1371.406 | 125 552 234 | 25 |
| 7 mm | 7 mm | transp. | 80.1371.407 | 125 552 434 | 25 |
| 8 mm | 8 mm | transp. | 80.1371.408 | 125 552 634 | 25 |
| 9 mm | 9 mm | transp. | 80.1371.409 | 125 552 834 | 25 |
| 10 mm | 10 mm | transp. | 80.1371.410 | 125 553 034 | 25 |
| 12 mm | 12 mm | transp. | 80.1371.412 | 125 553 434 | 25 |
| 14 mm | 14 mm | transp. | 80.1371.414 | 125 553 734 | 25 |
| 15 mm | 15 mm | transp. | 80.1371.415 | 125 553 834 | 25 |
| 16 mm | 16 mm | transp. | 80.1371.416 | 125 553 934 | 25 |
| 18 mm | 18 mm | transp. | 80.1371.418 | 125 554 134 | 25 |
| 20 mm | 20 mm | transp. | 80.1371.420 | 125 554 334 | 25 |
| 25 mm | 25 mm | transp. | 80.1371.425 | 125 554 834 | 25 |
| 30 mm | 30 mm | transp. | 80.1371.430 | 125 555 334 | 25 |
| 35 mm | 35 mm | transp. | 80.1371.435 | 125 555 634 | 25 |
| 1 mm | 1 mm |  | 80.1371.501 | 125 550 937 | 50 |
| 2 mm | 2 mm |  | 80.1371.502 | 125 551 437 | 25 |
| 3 mm | 3 mm |  | 80.1371.503 | 125 551 637 | 25 |
| 4 mm | 4 mm |  | 80.1371.504 | 125 551 837 | 25 |
| 5 mm | 5 mm |  | 80.1371.505 | 125 552 037 | 25 |
| 6 mm | 6 mm |  | 80.1371.506 | 125 552 237 | 25 |

Technische Änderungen vorbehalten – Sous réserve de changements techniques – Technical alterations reserved

Kabelschutz
 Isolierschlauch

Protection de cable
 Gaines isolantes

Cable protection
 Isolation conduit

| NORM |  |  | Plica-Nr. | E-Nr. | VE |
|-------|---|---|-------------|-------------|----|
| 7 mm | 7 mm |  | 80.1371.507 | 125 552 437 | 25 |
| 8 mm | 8 mm |  | 80.1371.508 | 125 552 637 | 25 |
| 9 mm | 9 mm |  | 80.1371.509 | 125 552 837 | 25 |
| 10 mm | 10 mm |  | 80.1371.510 | 125 553 037 | 25 |
| 12 mm | 12 mm |  | 80.1371.512 | 125 553 437 | 25 |
| 14 mm | 14 mm |  | 80.1371.514 | 125 553 737 | 25 |
| 15 mm | 15 mm |  | 80.1371.515 | 125 553 837 | 25 |
| 16 mm | 16 mm |  | 80.1371.516 | 125 553 937 | 25 |
| 18 mm | 18 mm |  | 80.1371.518 | 125 554 137 | 25 |
| 20 mm | 20 mm |  | 80.1371.520 | 125 554 337 | 25 |
| 25 mm | 25 mm |  | 80.1371.525 | 125 554 837 | 25 |
| 30 mm | 30 mm |  | 80.1371.530 | 125 555 337 | 25 |
| 35 mm | 35 mm |  | 80.1371.535 | 125 555 637 | 25 |
| 1 mm | 1 mm |  | 80.1371.601 | 125 550 925 | 50 |
| 2 mm | 2 mm |  | 80.1371.602 | 125 551 425 | 25 |
| 3 mm | 3 mm |  | 80.1371.603 | 125 551 625 | 25 |
| 4 mm | 4 mm |  | 80.1371.604 | 125 551 825 | 25 |
| 5 mm | 5 mm |  | 80.1371.605 | 125 552 025 | 25 |
| 6 mm | 6 mm |  | 80.1371.606 | 125 552 225 | 25 |
| 7 mm | 7 mm |  | 80.1371.607 | 125 552 425 | 25 |
| 8 mm | 8 mm |  | 80.1371.608 | 125 552 625 | 25 |
| 9 mm | 9 mm |  | 80.1371.609 | 125 552 825 | 25 |
| 10 mm | 10 mm |  | 80.1371.610 | 125 553 025 | 25 |
| 12 mm | 12 mm |  | 80.1371.612 | 125 553 425 | 25 |
| 14 mm | 14 mm |  | 80.1371.614 | 125 553 725 | 25 |
| 15 mm | 15 mm |  | 80.1371.615 | 125 553 825 | 25 |
| 16 mm | 16 mm |  | 80.1371.616 | 125 553 925 | 25 |
| 18 mm | 18 mm |  | 80.1371.618 | 125 554 125 | 25 |
| 20 mm | 20 mm |  | 80.1371.620 | 125 554 325 | 25 |
| 25 mm | 25 mm |  | 80.1371.625 | 125 554 825 | 25 |
| 30 mm | 30 mm |  | 80.1371.630 | 125 555 325 | 25 |
| 35 mm | 35 mm |  | 80.1371.635 | 125 555 625 | 25 |
| 1 mm | 1 mm |  | 80.1371.701 | 125 550 926 | 50 |
| 2 mm | 2 mm |  | 80.1371.702 | 125 551 426 | 25 |
| 3 mm | 3 mm |  | 80.1371.703 | 125 551 626 | 25 |
| 4 mm | 4 mm |  | 80.1371.704 | 125 551 826 | 25 |
| 5 mm | 5 mm |  | 80.1371.705 | 125 552 026 | 25 |
| 6 mm | 6 mm |  | 80.1371.706 | 125 552 226 | 25 |
| 7 mm | 7 mm |  | 80.1371.707 | 125 552 426 | 25 |
| 8 mm | 8 mm |  | 80.1371.708 | 125 552 626 | 25 |
| 9 mm | 9 mm |  | 80.1371.709 | 125 552 826 | 25 |
| 10 mm | 10 mm |  | 80.1371.710 | 125 553 026 | 25 |
| 12 mm | 12 mm |  | 80.1371.712 | 125 553 426 | 25 |
| 14 mm | 14 mm |  | 80.1371.714 | 125 553 726 | 25 |
| 15 mm | 15 mm |  | 80.1371.715 | 125 553 826 | 25 |
| 16 mm | 16 mm |  | 80.1371.716 | 125 553 926 | 25 |
| 18 mm | 18 mm |  | 80.1371.718 | 125 554 126 | 25 |
| 20 mm | 20 mm |  | 80.1371.720 | 125 554 326 | 25 |
| 25 mm | 25 mm |  | 80.1371.725 | 125 554 826 | 25 |
| 30 mm | 30 mm |  | 80.1371.730 | 125 555 326 | 25 |
| 35 mm | 35 mm |  | 80.1371.735 | 125 555 626 | 25 |

Technische Änderungen vorbehalten – Sous réserve de changements techniques – Technical alterations reserved